


# QUARTZ BIFACIAL

## 330 Wp

MYL-330-BMB-BG

GLASS  
GLASS  
BIFACIAL

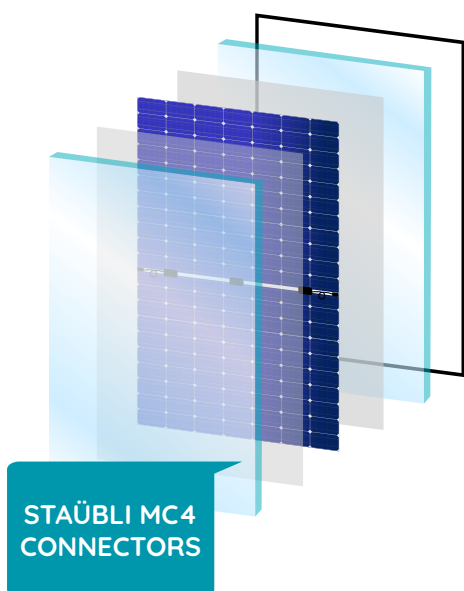

### Double-sided technology :

**electricity is produced by both sides of the module**

Production of **up to 30%** more power using the light reflected by the rear



### Dual glass technology that is built to last

- No risks of micro-cracks, thanks to the identical strength of the two sides of the cell

- The rear of the module is totally waterproof



### Half-cell technology :

- High-performance panel

- Higher surface efficiency




### More power, irrespective of the weather conditions :

- High energy performance thanks to the performance in poor light

- Highly resistant to the environmental conditions (sand, acid, hail, salt mist, ammonia)

- Anti-PID

### Linear performance

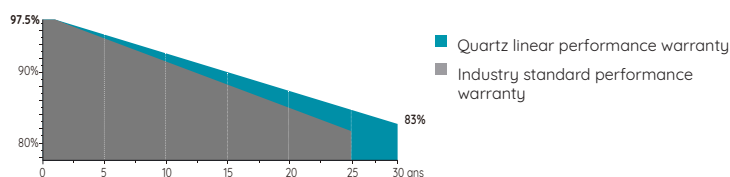

MyLight Systems, France's leading manufacturer of solar self-consumption solutions, is driven by the ambition to enable everyone to produce their own electricity

At every stage of their production process, our modules benefit from our unique know-how that combines innovation and a demand for premium quality.

MyLight Systems and French Tech share the same mission: to make France one of the most attractive countries in the world and to build a future that makes sense.

### Certifications & Accreditations



### Quality standards

ISO19001 / ISO14001 / OHSAS18001

## 0/+5W

Power tolerance

## 30 years

Product warranty

## 30 years

Linear performance warranty

## MECHANICAL DATA

Dimensions (L/W/H)	1720 x 1008 x 30mm
Weight	22.5 kg
Number of cells, type and dimensions	120 pcs PERC Monocrystallin 158,75 x 79,375mm
Front/rear glass	High-transparency, anti-reflection glass, 2.0 mm x 2
Frame	Anodized aluminium
Type of connector	Stäubli MC4
Junction box	IP68 with 3 diodes
Connecting cable	4.0 mm <sup>2</sup> , Portrait: 255 mm (+) / 355 mm (-); Landscape: 1,200 mm

## PACKAGING SPECIFICATIONS

Modules per pallet	32
Modules per truck	768

## ELECTRICAL DATA (STC\*)



MODEL	330Wp
	Front
Maximum power $P_{max}$ (W)	330
Open circuit voltage $V_{oc}$ (V)	41.1
Short circuit current $I_{sc}$ (A)	10.02
Maximum power voltage $V_{mp}$ (V)	34.7
Maximum power current $I_{mp}$ (A)	9.52
Module efficiency $\eta_m$ (%)	19.03
Power tolerance (W)	0/+4.99
$P_{max}$ temperature coefficient	-0.36 %/°C
$V_{oc}$ temperature coefficient	-0.28 %/°C
$I_{sc}$ temperature coefficient	+0.05 %/°C

\*STC (Standard Test Conditions): Irradiance 1,000 W/m<sup>2</sup>, module temperature 25°C; AM = 1.5


## APPLICATION CONDITIONS

Maximum system voltage	1500VDC
Maximum Series Fuse Rating	20A
Operating temperature	-40-+85 °C
Nominal Operating Cell Temperature	45+/-2 °C
Bifaciality	70%+/-5%
Mechanical load	Front 5400Pa / Rear 2400Pa

## CHARACTERISTIC CURVE

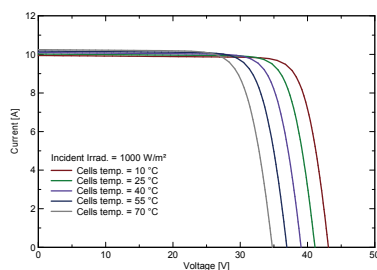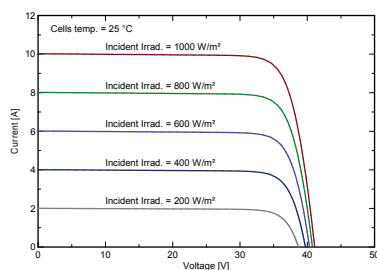

## DIMENSIONS\*

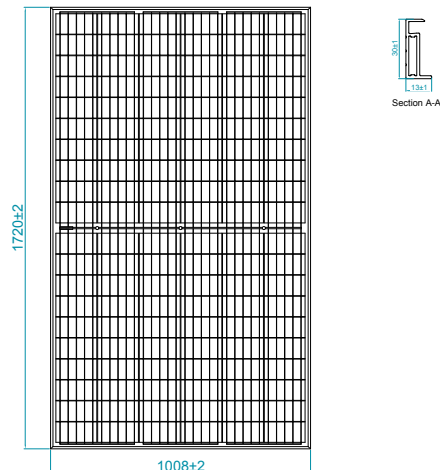

\*all dimensions are in mm

## REAR IRRADIANCE - rear side power gains

10%	15%	20%	25%	30%
363	380	396	413	429
41.1	41.1	41.1	41.1	41.1
11.02	11.52	12.02	12.53	13.03
34.7	34.7	34.7	34.7	34.7
10.47	10.95	11.42	11.90	12.38

